


## KS 6315 / 6115 Fan-Free Terminal

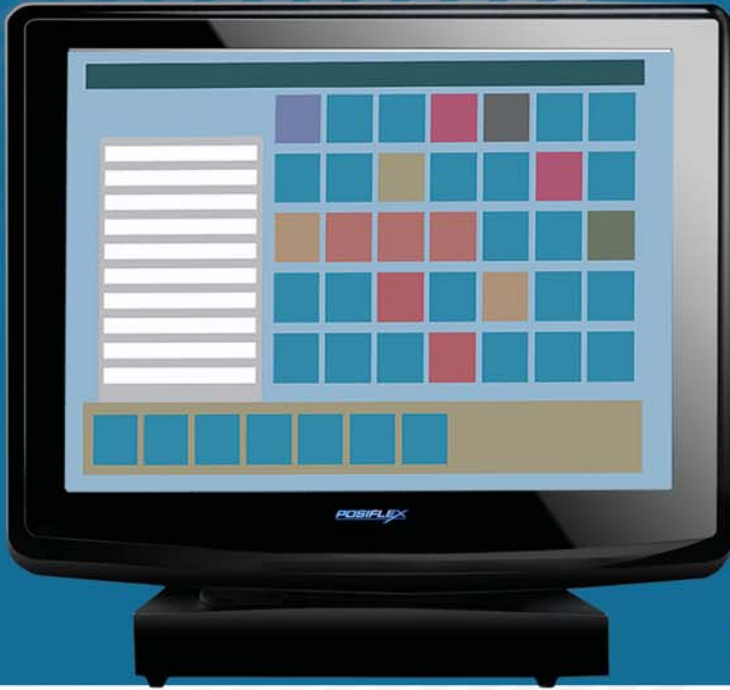

### Key Features:

- Fan-Free (no heat pipes or liquids)
- Thick or thin client
- Runs cool even with 21 Watt CPU
- Reliable 2.5" HDD
- Built for harsh environments
- Choice of Microsoft® WEPOS, Windows XP Professional or CE models
- Full line of complementary peripheral options
- Private label front bezel logo\*

*Perfect for Kiosks!*

### Posiflex KS 6315 / 6115

Optimized for heat transfer efficiency, the KS6315 / KS6115 'Fan-Free' Terminal series by Posiflex is designed to leverage the heat conductivity of its ultra-thin aluminum chassis, instead of liquid or fan-cooled systems, to improve its long-term reliability in the harshest environment. Benefits include quiet operation, less moving parts, spill resistant architecture, lower power consumption and easy maintenance. Available with thick or thin client configurations that operate using Microsoft® Windows Embedded for Point-of-Service, Windows XP Professional and CE. Additionally, Posiflex offers the unique ability to private label the KS terminal via an illuminated logo on the front bezel. For more information, please visit [www.posiflexusa.com](http://www.posiflexusa.com) or email us at [sales@posiflexusa.com](mailto:sales@posiflexusa.com).

**For more information call (888) 968.1668 today!**

\* Minimum order requirements may apply

Posiflex  
30689 Huntwood Avenue  
Hayward, CA 94544  
Toll-free: 888.968.1668 Phone: 510.429.7097  
Fax: 510.475.0982  
Email: [sales@posiflexusa.com](mailto:sales@posiflexusa.com)  
[www.posiflexusa.com](http://www.posiflexusa.com)

© 2008 Posiflex Business Machines, Inc. Posiflex and KS are trademarks of Posiflex Business Machines Inc. All other brand and company names are the property of their respective owners.



Function	KS 6315	KS 6115
Processor	Intel Celeron® 1.0GHz	AMD LX-700
Memory	Standard 512MB (expandable to 1GB), DDR SDRAM SO-DIMM x 1	
VGA Memory	Default 8MB, expandable to 32MB, share memory from system memory	Default 8MB, expandable to 254MB, share memory from system memory
Power Supply	12 VDC power adaptor, 80W	12 VDC power adaptor, 42W
Housing	Aluminum die casting	Plastic & steel
Speaker	Built-in	
OS Support	Microsoft® WIN XP / WEPOS	Microsoft® WIN CE 5.0 / WEPOS
Safety Certifications	FCC-A, CE-A	
<b>Display</b>		
LCD	15" LCD, 250 nits, 1024 x 768 dual, display mode supported	15" LCD, 250 nits, 1024 x 768 mirror, display mode supported
Touch Sensor	Resistive	
Touch Controller	USB interface mouse emulation	
Brightness Control	Hardware VR or software control	Hardware VR control
Tilt Adjustment	From 17.5° to 76.5°	
<b>Expansion</b>		
Storage Device	40 GB HDD	CF memory card or HDD (cannot co-exist)
Mounting Option	Desktop or wallmount (option)	
<b>Connectivity</b>		
Audio Port	2 Watt AUDIO output with built-in speaker, Mic. In/Line Out ports available when optional SD-400 installed	
Compact Flash Port Type II, memory card only)	Optional (special order)	Standard
CR Port	N/A	
KB Port	1 x P/S II	
LAN Port	1 x 10/100 Base T Ethernet	
PS/2 Mouse Port	N/A	
Parallel Port	1 x SPP / EPP / ECP	
Serial Port	2 x, each with +5V power supply	
UPS Port	1 x battery health auto-check	N/A
USB Port	4 x, USB 2.0 + 1 proprietary port for SD-400	
<b>Environment</b>		
Operation Condition	0°C~+35°C (32°F~+95°F), 20%RH~80%RH, non-condensing max wet bulb 26°C (78.8°F)	
Storage Condition	20°C~+60°C (4°F~+140°F) without UPS battery, -20°C~+40°C (-4°F~+104°F) with UPS battery, 10%RH~80%RH, non-condensing max, wet bulb 28.9°C (84.0°F)	
<b>Options</b>		
2nd LCD Display	12" LM6101B or VGA Port	
Customer Pole Display	PD2501: 11mm VFD display, 5x7 dot matrix, RS232 interface PD2602: 2x20 VFD display, 5x7 dot matrix, default RS232 interface, optional USB interface	
SD-400 Magnetic Strip Reader	Optional 2-track or 3-track MSR with/without Finger Print Sensor	
UPS Battery	2.5 Ahr / 12 V, in base stand	N/A



### ALL KS FAN-FREE TERMINAL MODELS CAN BUNDLE WITH:

- SD400 Series MSR with/without Digital Persona U.are.U Finger Print Sensor
- CR6000 Series Cash Drawer
- PP7000 Series Aura Thermal Receipt Printer
- PD2501 / 2602 Series Pole Display
- LM6000 Series 12" 2nd Display

### KS6315 / 6115 Features & Options



Rear mount bracket for optional 12" 2nd display (LM6000 Series)




Built-in removable 2.5" HDD in base stand



Optional built-in battery

### KS6315 Main Board Interface Diagram

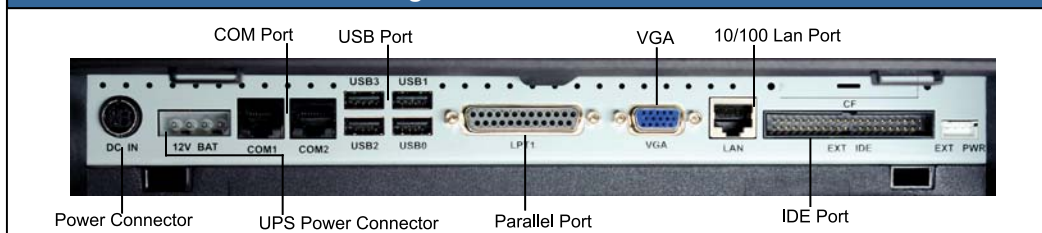

### About Posiflex

Established in 1984, Posiflex is recognized as a leading provider of innovative Point-of-Service (POS) hardware and platform technology used in diverse markets. Posiflex partners with applications software developers to provide reliable POS terminal systems to the hospitality, healthcare, medical, retail and specialized markets. The Company's products are sold through industry specialists, value-added resellers and distributors. All products are designed and manufactured in Taipei, Taiwan in two ISO 9001/9002/14001 certified laboratories and factories. Posiflex USA is located just north of the Silicon Valley, in Hayward, California. For additional information on Posiflex and the diverse product line, visit [www.posiflexusa.com](http://www.posiflexusa.com) or call 888.968.1668.



Leaders in POS Terminal Technology  
 30689 Huntwood Avenue  
 Hayward, CA 94544  
 Toll-free: 888.968.1668  
 Phone: 510.429.7097  
 Fax: 510.475.0982  
 Email: [sales@posiflexusa.com](mailto:sales@posiflexusa.com)