
XT8315 Series



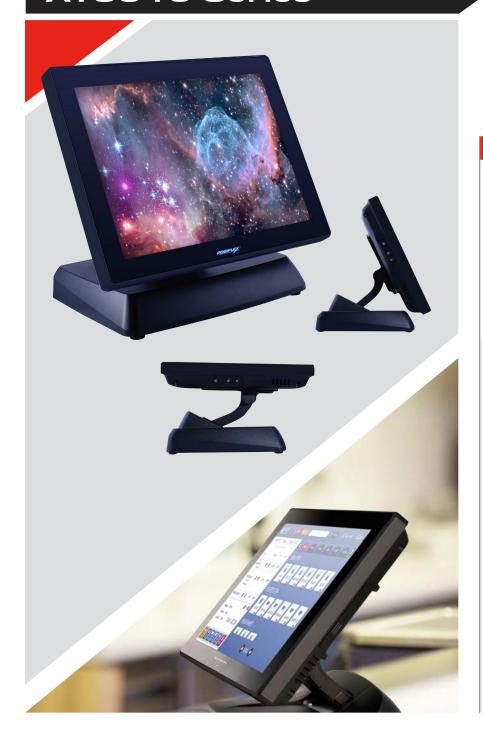

KEY FEATURES

- Intel® Core™ i3-1115G4, 3.0 GHz
- 2x slots 4GB DDR4 SO-DIMM (Max. 64GB)
- Projected Capacitive touch
- Sleek, folding base design
- Slimmer overall footprint
- Optional Upgrade Kits
 - Powered USB and USB Hub Expansion Kit
 - PU490 Hub
 - (1) 24V Powered-USB Port
 - (3) 12V Powered-USB Ports
 - 150W Power Adapter
 - PU480 Hub
 - (1) 24V Powered-USB Port
 - (8) Standard USB 2.0 Ports
 - 150W Power Adapter

Power and Performance

The XT8315 is part of the XT Series, built with a practical and durable design. The XT8315 is carefully thought out to make itself one of the most visually desirable terminals in the market.

And, with a patented foldable base, users can adjust the screen to a height and angle of their choice, providing unparalleled flexibility.

With its fanless design, the XT8315 requires less maintenance and can run silently, which is ideally suited for high-end boutique stores or hospital environments.

	XT8315 Series
Specifications	
Processor Options	Intel® Core™ i3-1115G4, 6M Cache, 3.0 GHz
System Memory	2x slots 4GB DDR4 SO-DIMM (Max. 64GB)
TPM Support	TPM 2.0
Storage Device	128GB SSD or higher. Up to two drives.
Supported OS	Windows 10 IoT Enterprise 64bit
Passive Cooling	Fanless
Touch	True-Flat Projected Capacitive with Multi-touch support
Physical Dimensions	
Dimensions (WxDxH) in.	14.6 x 12.6 x 10
Display	15" (1024 x 768)
Weight (lbs)	12.9
Connectivity	
LAN Port	2 x Gigabit LAN
Serial Port	2 x DB9 Serial; 3 x RJ-50 Serial (5v/12v support on all COM ports 1-3)
Display Port	1x VGA Port (12v Support for Posiflex monitors) + 1 x HDMI
USB Port	2 x USB 2.0; 4 x USB 3.0
12v Battery Port	1 x Proprietary port used with RB2000
Mini-PCle Slot	1 x M.2 slot
CR Port	1 Port (Controls 2 Drawers); Dual Independent Open Sensor; COM1/COM5 Select; 24v Support
Options	
SSD	SSD
Parallel Port	Parallel Port with optional extension cable
Wall Mount	WB-5000 wall mount bracket
VESA Mount	100mm
WiFi/Bluetooth	M.2 802.11ac, Dual Band 2.4GHz / 5GHz; BT 4.2
Powered USB	1 x 24V + 3 x 12V (via GEN8E base)































P: 888-968-1668 F: 510-475-0982 sales.department@posiflexusa.com www.posiflexusa.com

^{**} The product information and specifications are subject to change without prior notice.